Product Introduction
产品简介





管管连接
Hose to Hose



管具连接
Hose to Tool

钢缆安全绳是专门设计的，如果软管或接头不能固定，可以防止软管接头的摆动。故障通常发生在高压环境下，会使软管或设备剧烈震动，可能对人员或附近的连接件和设备造成严重伤害。

Whipcheck safety cable is designed specially to prevent hose connections from whipping if the hoses or couplings failed to hold. The failure usually occurs with high pressure and will make hoses or equipment shake violently which may cause serious injury for people or the nearby coupling & equipment.



铜套
copper bush



不锈钢
SS304and316

stock size
常规尺寸


尺寸 size	钢缆长度 Cable Lenght	钢丝绳直径Wire rope diameter	弹簧尺寸Sping size		铝套长度Aluminium sleeve Length			
			长度Length	粗细Thickness	中间Centre	两边TOP & Down	管径范围Pipe diameter range	破断力breaking load
								
1/8" * 12"	300mm	3mm	8cm	1.2mm	3cm	1.2cm	1/2"-1 1/4"	500KG
1/8" * 20 1/4"	514mm	3mm	18mm	1.2mm	3cm	1.2cm	1/2"-1 1/4"	500KG
3/16 * 28"	710mm	5mm	24cm	1.2mm	5cm	2cm	1/2"-2"	1000KG
1/4" * 38"	965mm	6mm	34cm	2mm	5cm	2cm	1 1/2"-3"	1800KG
3/8" * 44"	1110mm	9.5mm	30cm	2mm	6.5cm	2.5cm	4"-5"	2500KG
1/2" * 55"	1400mm	11.5mm	48cm	2mm	7cm	4cm	6"	3500KG

Packing detail
包装明细

尺寸SIZE	每箱数量/个 QTY carton	每箱净重/KG Nw carton	每箱毛重/KG Gw carton	纸箱尺寸/CM Carton size		
1/8" * 12"	300	16	16.5	100	15	15
1/8" * 20"	100	6.7	7	55	15	15
3/16" * 28"	50	9	9.5	75	15	15
1/4" * 38"	50	17	17.5	100	15	15
3/8" * 44"	25	18	18.5	115	15	15
1/2" * 55"	15	16	16.8	145	15	15

Application scenario
应用场景



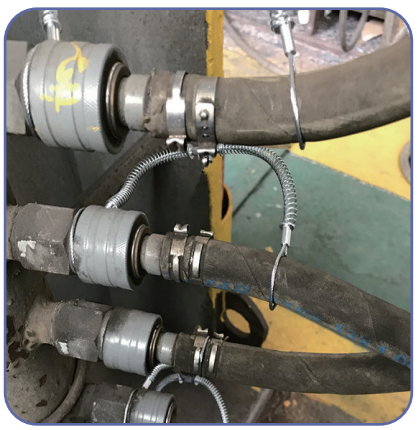



Product Introduction
产品简介





常规款式
single clamp



双头款式
double clamp

最终软管鞭的解决方案是使用软管约束系统。软管约束系统设计用于防止在软管与配件分离的情况下压力软管的抽动。它们提供了额外的安全级别，并通过限制加压软管从配件上脱落后的行程距离，帮助防止损坏附近的设备或对故障软管附近的操作人员造成伤害。

The ultimate hose whip solution is to use a hose restraint system. Hose restraint systems are designed to prevent pressure hose jerking in the event of hose separation from fittings. They provide an additional level of safety and help prevent damage to nearby equipment or injury to operators near a faulty hose by limiting the distance the pressurized hose can travel after it detaches from the fitting.



可拆卸款式
detachable clamp



常规款式
single clamp

喉箍尺寸(mm)
clamp size

17-19	52-55	104-112
20-22	56-59	113-121
23-25	60-63	122-130
26-28	64-67	131-139
29-31	68-73	140-148
32-35	74-79	149-161
36-39	80-85	162-174
40-43	86-91	175-187
44-47	92-97	188-200
48-51	98-10	201-213



螺纹孔(mm)
Threaded hole


8.5	30.5
10.5	34.5
12.5	36.5
15	40.5
17	42.5
18.5	45.5
20.5	52.5
22.5	60.5
24.5	62.5
27.5	64.5




另外，新增孔径49

Application scenario
应用场景



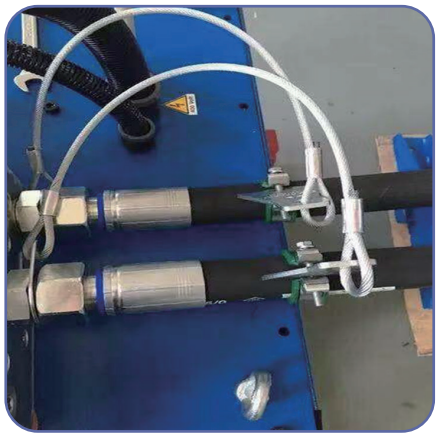

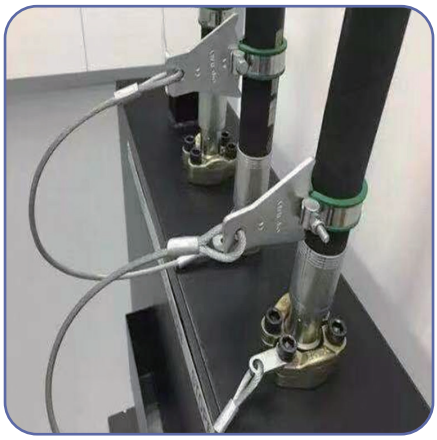







Product Introduction
产品简介





单头网套
Single Eye



双头网套
double

油管网套软管安全约束系统旨在显著降低因高压软管爆裂故障造成的伤害风险。大直径压力软管所产生的巨大力可能会造成致命伤害，而且很难迅速控制。此外，如果正在运输危险化学品，清理和停机时间可能会花费高昂。鞭子停止安全约束系统，也被称为鞭子袜，将防止反吹和紧紧抓住高压软管在检查，直到压力可以安全地降低。

Whipsock hose safety restraint system is designed to significantly reduce the risk of injury caused by a high pressure hose blow-out failure. The magnitude of force caused by a large-diameter pressurized hose can cause fatal injury and be difficult to quickly restrain. Additionally, cleanup and downtime can be costly if hazardous chemicals are being conveyed. The whip stop safety restraint system, also known as a whip sock, will prevent blow back and tightly hold a

stock size
常规尺寸

管径范围（mm） Pipe diameter	长度 （m）	重量 （KG）
7-12	0.8	0.22
13-18	0.8	0.23
19-25	1.1	0.35
26-37	1.1	0.48
38-50	1.1	0.6
51-65	1.1	0.85
66-78	1.3	0.95
79-90	1.6	1.3
91-110	1.6	1.9
111-130	1.9	2.4





Application scenario
应用场景

